

# NASA TECH BRIEF

## *Manned Spacecraft Center*



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

### High Pressure Liquid Gas Pump

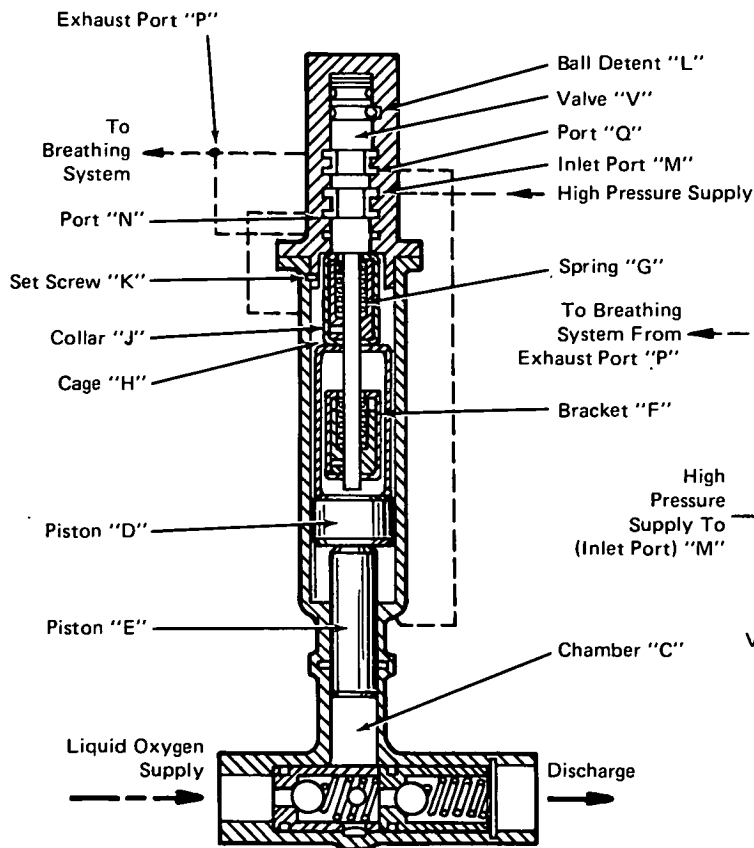


Figure 1. Cryo Pump With Mechanical Valve Shift

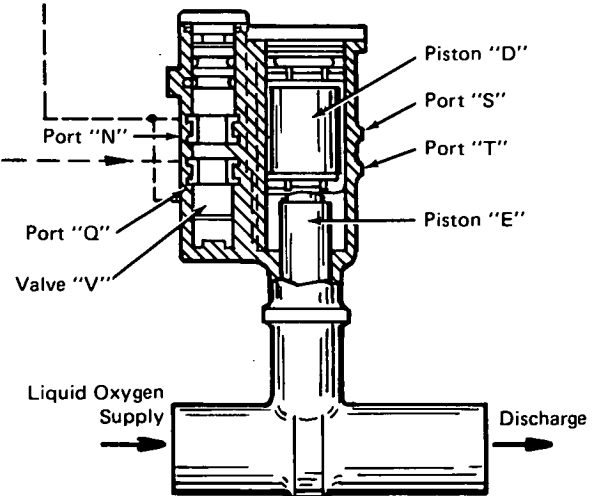


Figure 2. Cryo Pump With Pneumatic Valve Shift

#### The problem:

High pressure gas generators are usually fed by piston pumps which tap the liquid gas from the low pressure storage. Such pumps must be compact and be capable of withstanding a cryogenic environment.

#### The solution:

Two different pumps have been designed: one with a mechanical valve shift and the other with a pneumatic shift. Both designs are suitable for cryogenic fluids in

the pressure range of hundreds to a few thousand atmospheres.

#### How it's done:

Figure 1 shows the pump with a mechanical valve shifter. As shown, piston D has just completed an upward stroke. Near the end of the upward stroke, bracket F, which is a part of piston D, has moved cage H upward compressing spring G until cage H engages collar J. This collar is attached to the stem of valve V, and has driven

(continued overleaf)

valve V upward causing ball detent L to move to the right until it reaches the land between the upper and lower detent grooves. At this point spring G snaps the valve upward until detent L drops into the lower detent groove where it is shown. In this position, valve V connects ports M and N together and directs high pressure gas to the upper side of piston D thus forcing it downward. At the moment that valve V shifts, it also connects port Q to port P, allowing the gas below piston D to exhaust. While piston D is rising, the check valve below and to the left of chamber C is being held open by the differential pressure across it, and chamber C is being filled with liquified gas. Now this liquid is trapped so that, as piston D descends, piston E produces a high pressure in chamber C which opens the check valve on the right and forces the liquid into the discharge line.

In the gas operated valve shift design, shown in Figure 2, a liquified gas pump in which valve V is shifted by gas pressure (which is applied to one end or the other of valve V by piston D) and uncovers either port S or T. This pump is shown at the end of the up-

ward stroke and with port T uncovered but before valve V has been forced down. That portion of this pump not shown in cross section B is identical to that of the lower portion of Figure 1.

**Note:**

No additional documentation is available. Specific questions, however, may be directed to:

Technology Utilization Officer  
Manned Spacecraft Center  
Code JM7  
Houston, Texas 77058  
Reference: B72-10590

**Patent status:**

NASA has decided not to apply for a patent.

Source: Richard L. Acres of  
Service Technology Corp.  
under contract to  
Manned Spacecraft Center  
(MSC-14087)